

# Knowledge Base Article

Product Group: Software; Microlog Analyzer  
 Product: CMSW7311 – Analysis and Reporting Manager; CMXA70  
 Microlog GX  
 Version: ARM software v2.0; GX firmware v2.03

## Abstract

The message “Error loading module P2P.dll” is displayed when attempting to upload non-route data from a Microlog GX70 into SKF Analysis and Reporting Manager (stand-alone version) software. This article discusses the issue and also provides a workaround.

## Overview

The “P2P.dll” is used by SKF Analysis and Reporting Manager (ARM) to unload non-route data. It was removed in v2.0 because in Microlog firmware v4, the “Non-Route” module was incorporated into the “Analyzer” module and so therefore non-route data is unloaded as Analyzer module files. This turns out to be unfortunate for users who still run older versions of the Microlog.

To work around the issue, perform the following steps:

1. Save the file labeled “P2P.dll” located under the Attachments section to the right. [Figure 1]
- If you are unable to download the file, or the article is not being viewed from within the SKF Technical Support Self-Help Portal, please contact the Technical Support Group for this file.

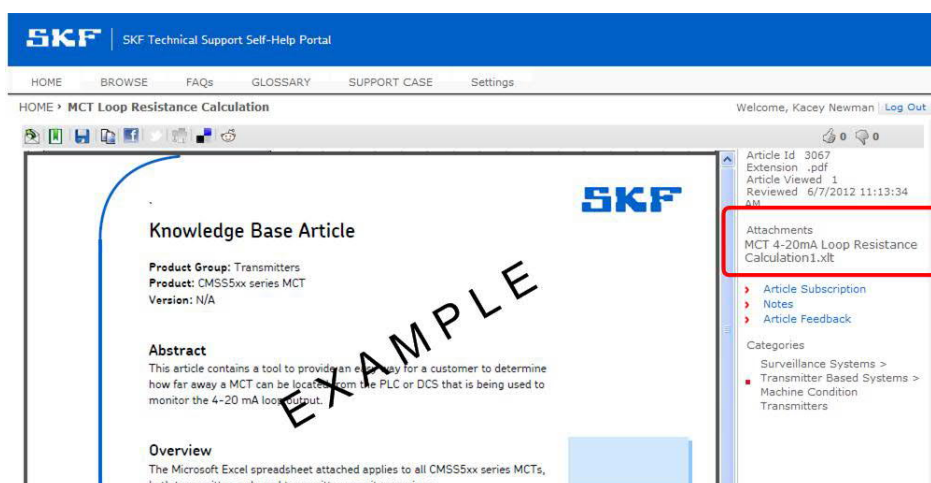


Figure 1. Attachments section in the Self-Help Portal

2. Place the file in the Analysis and Reporting Manager folder. In Windows 7, the default directory would be:

C:\Program Files (x86)\SKF-RS\Analysis and Reporting Manager

3. Perform the upload again. The error will no longer be seen.

----

For further assistance, please contact the Technical Support Group by phone at 1-800-523-7514 option 8, or by e-mail at [TSG-CMC@skf.com](mailto:TSG-CMC@skf.com).

