

Knowledge Base Article

Product Group: MARLIN I-Pro

Product: CMDM 6600 – Microlog Inspector

Version: N/A

Abstract

This article provides instructions on how to set up the CMDM 6600 series I-Pro system to communicate over a network through a proxy server using the CMAC 6156 Ethernet adapter or CMAC 6153-E Quad Dock. Although the procedure will vary slightly for other CMDM models, these instructions can still be used as a reference.

Overview

Follow the steps below to configure the CMDM 6600 series I-Pro device to use a proxy server.

Configuring Adapter Connection

1. On the handheld, go to **Start > Settings > Connections**.
2. Select **Network Cards**. [Figure 1]

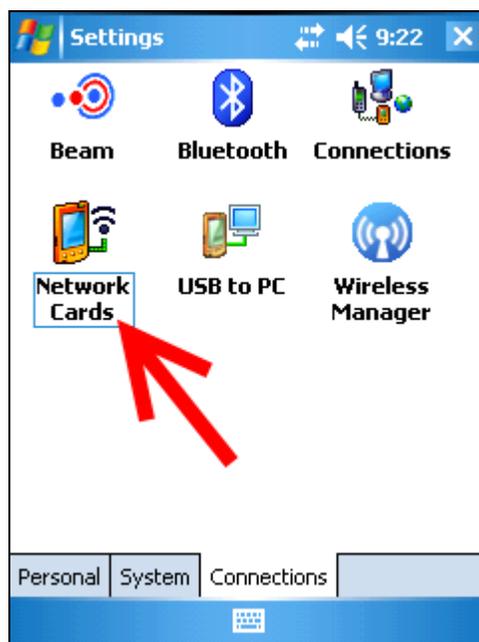


Figure 1. Network Cards icon

- Configure the network card to connect to **Work** [Figure 2] by selecting it from the drop-down menu.

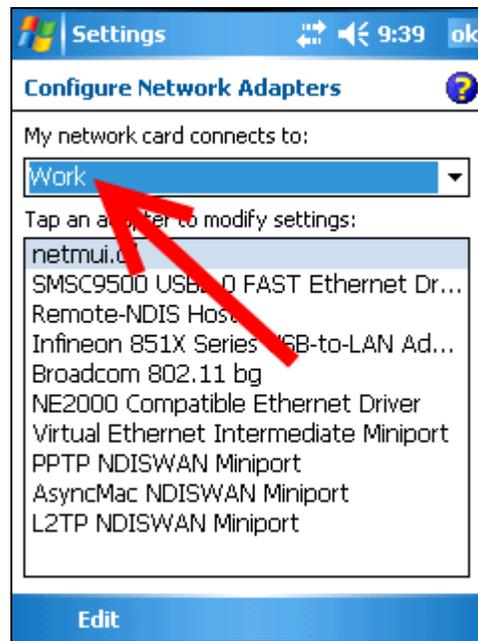


Figure 2. Network card configuration

- Click **OK** in the upper right corner to save.

Configuring Proxy Settings

5. Click on **Connections**. [Figure 3]



Figure 3. **Connections** icon

6. Click the [Set up my proxy server](#) link. [Figure 4]

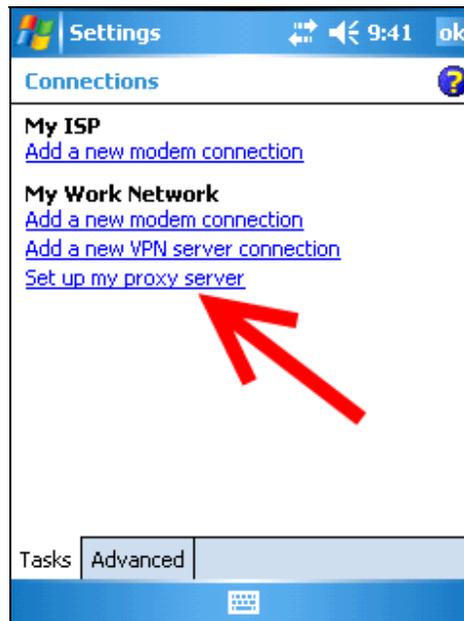


Figure 4. Setting up the proxy server

7. Check the options *This network connects to the Internet* and *This network uses a proxy server to connect to the Internet*. [Figure 5]

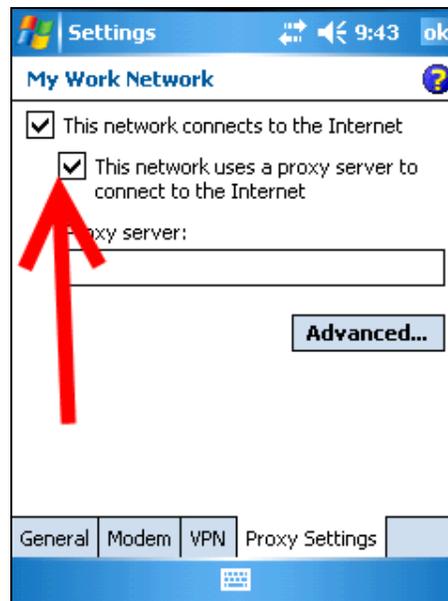


Figure 5. Proxy server settings

8. Type the proxy server IP address in the **Proxy Server** field. [Figure 6]
A fictitious IP address is shown in the example below:

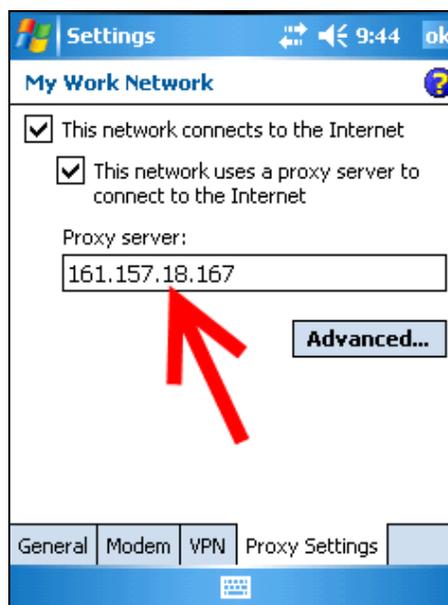


Figure 6. IP address field

9. Next, click on the **Advanced...** button.

10. Click on **HTTP**. [Figure 7]

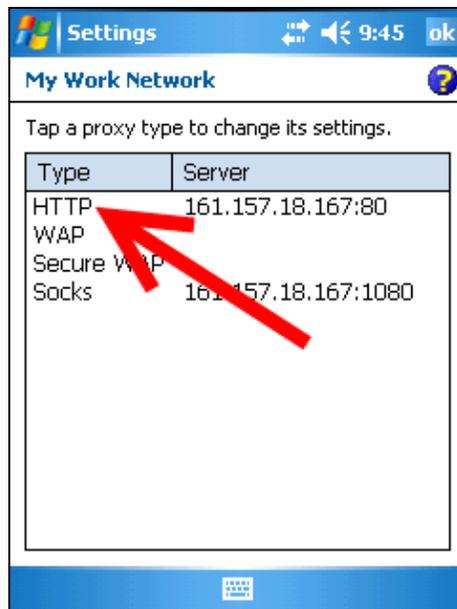


Figure 7. HTTP settings

11. Configure the **Port** number. [Figure 8]

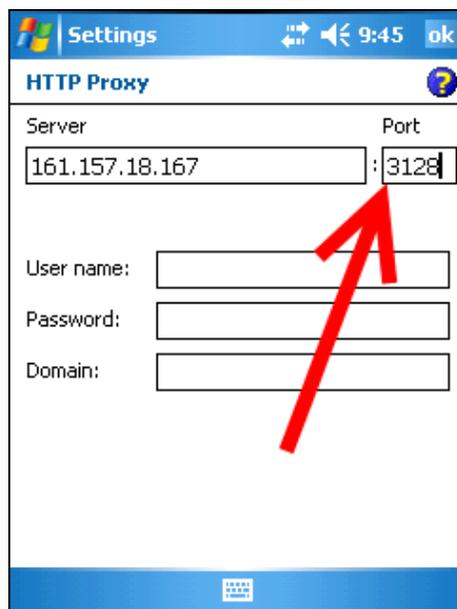


Figure 8. Configuring port

12. Click **OK** in the upper right corner to save.

13. Next, click on **Socks**. [Figure 9]

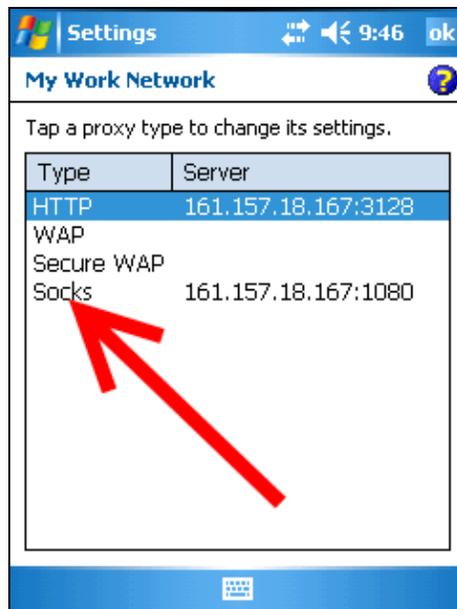


Figure 9. Socks settings

14. Configure the **Port** number. [Figure 10]



Figure 10. Configuring port

15. Click **OK** in the upper right corner to save.

16. Click **OK** again to save.

17. Click **OK** again to save once more.

The CMDM 6600 device is now configured for communication through a proxy server.

For further assistance, please contact the Technical Support Group by phone at 1-800-523-7514 option 8, or by email at TSG-Americas@skf.com.

