

Knowledge Base Article

Product Group: Inspection Systems
 Product: CMDM6700 – Microlog Inspector; CMVL3600 - MCD
 Version: OS v1.60.22.0066

Abstract

This article contains a RFID patch and installation instructions that fixes the SKF Microlog Inspector CMDM6700 with built-in RFID, so that it works with the CMVL3600 MCD and the cable and snap-on adapter. The possibility of someone using the CMDM6700 with the MCD and cable is EXTREMELY low, but it is available if someone needs it.

Overview

Follow the instructions below to download and install the RFID patch onto a CMDM6700 handheld.

1. Save the file "SR14062500_RFID_Cx70WM65_ALL.CAB" located in the Attachments section to the right of this article onto your desktop. [Figure 1] If this article is not being viewed from within the SKF Technical Support Self-Help Portal, please contact TSG for a copy of the attachment.



Figure 1. Download the file under the Attachments section, circled in this example

2. Next, right click on the file and select Properties. Ensure the "Read-only" attribute is checked. [Figure 2]

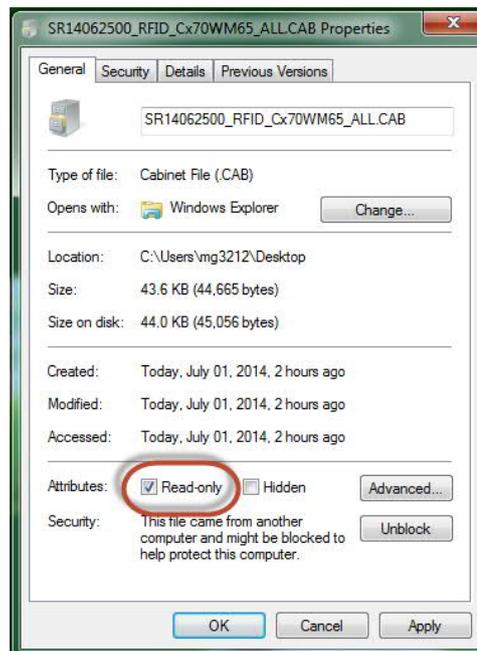


Figure 2. Check the "Read-only" attribute

- Using Windows Mobile Device Center (on Windows 7), copy the file to the device's \Flash File Store\CABFILES directory. [Figure 3]

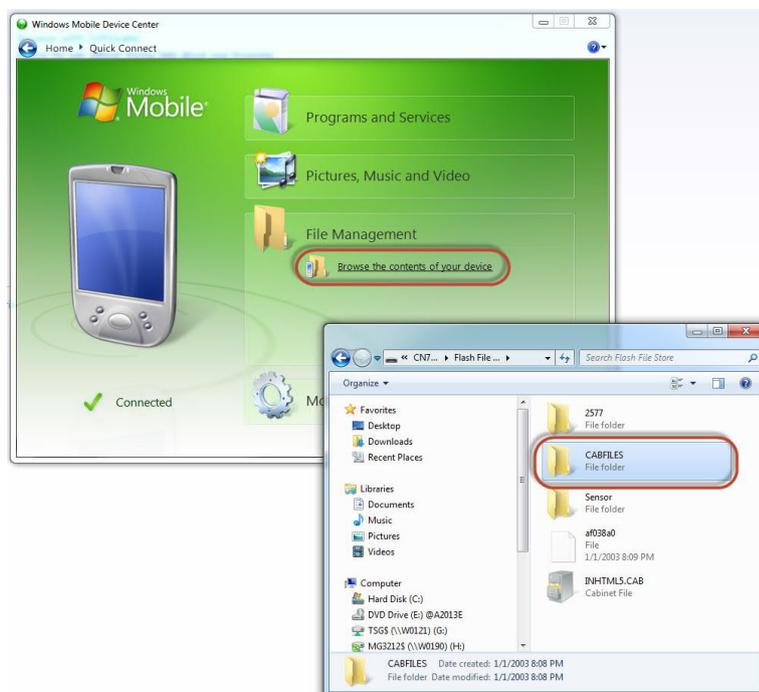


Figure 3. Paste file in \Flash File Store\CABFILES

4. On the device, open Windows Explorer by clicking Start > File Explorer. [Figure 4]



Figure 4. File Explorer menu

5. Navigate to \Flash File Store\CABFILES. [Figure 5]



Figure 5. Go to Flash File Store, then CABFILES

6. Click on the file "SR14062500_RFID_Cx70WM65_ALL.CAB" to install the patch. [Figure 6]



Figure 6. Click on CAB file to install

7. When prompted, elect to save the file to "Device" location [Figure 7] and then click Install.

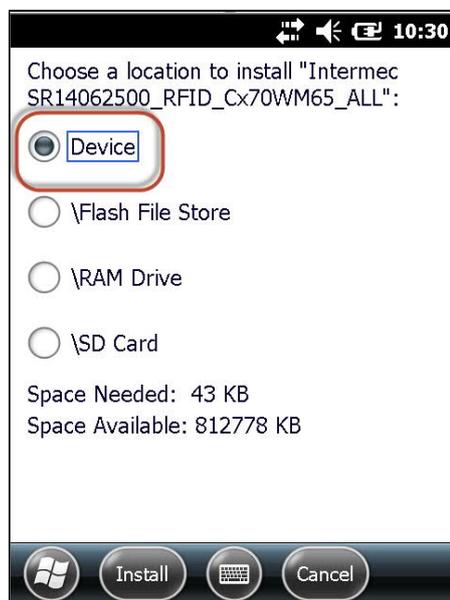


Figure 7. Save to "Device" location

8. The device may reboot itself a couple of times while it installs the patch.

Once the device returns to the main Windows home screen, the device can be used.

For further assistance, please contact the Technical Support Group by phone at 1-800-523-7514 option 8, or by e-mail at TSG-CMC@skf.com.

